

tab@lign

Laser shaft alignment goes mobile




- Mobility - Shaft alignment for tablets and smart phones
- Connectivity - All you need for maintenance on one single device
- Convenience - Quick and intuitive



Made for
iPod iPhone iPad

Lifting the boundaries for infinite freedom

tab@lign – mobile, connected, convenient



Shaft alignment at your fingertips

tab@lign is a unique laser shaft alignment solution for tablets and smart phones. Supporting both Apple and Android mobile devices, tab@lign offers unprecedented mobility, connectivity and convenience.

Perfect for performing standard shaft alignment including quick alignment checks on machines such as a motor-pump combination, tab@lign offers the same intuitive operation as with other PRÜFTECHNIK alignment systems.

tab@lign comprises the app, the measurement components and a Bluetooth® module for wireless communication. The app runs on everyday mobile devices. A rugged industrial tablet with glove-enabled touchscreen is available as an additional option.

As with all products from PRÜFTECHNIK Alignment Systems, tab@lign inherits the high accuracy and quality that have always been our standard.

Simply download the app and go!

Key benefits of tab@lign

tab@lign boosts the efficiency of shaft alignment through:

- ▶ Fully mobile and wireless laser alignment system
- ▶ Integrated working platform
- ▶ Intuitive user interface with touch operation
- ▶ Proven high-precision laser measurement technology

Mobility

Built on the latest mobile communication technologies, this new generation solution makes laser shaft alignment available to on-site maintenance teams and professionals exactly where and when they need it.

Connectivity

Enjoy shaft alignment in a new mobile dimension: display and update service requests, check emails, view documentation, take snapshots, measure and display correction results, send out reports, and much more. Combined with all the information, tools and applications required for the maintenance job on one single multi-functional platform, shaft alignment has never been so integrated.

Convenience

Shaft alignment on mobile devices means greater flexibility and availability. But there is even more to tab@lign. Exactly the proper features and an intuitive user interface make the alignment job a fast and easy exercise.




tab@lign features at a glance



3 steps to alignment

- ▶ Enter dimensions
- ▶ Rotate shafts
- ▶ Display measurement result

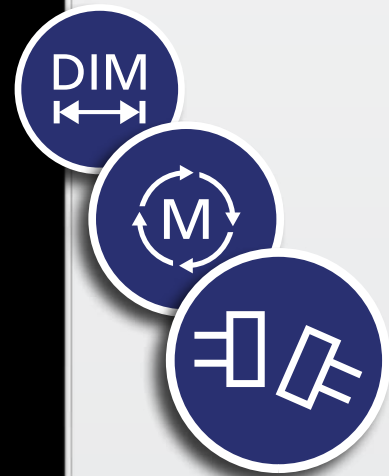

Equipped with the PRÜFTECHNIK patented single-laser technology, and offering a high system dependability, tab@lign delivers accurate and repeatable measurement results.

Bluetooth® communication

The wireless module enables a convenient data transmission between the measurement sensor and the alignment app for a fully cable-free system operation.

Active Clock measurement

During shaft rotation, measurements are automatically taken at 3 sensor positions. A shaft rotation of only as little as 70° is required. The activated electronic inclinometer eliminates possible user error for intelligent and precise alignment.

Result and Live Move

Both horizontal and vertical coupling and foot results are automatically calculated and displayed. The graphics show the machine position and the arrows the necessary feet corrections. During Live Move, tab@lign monitors the horizontal changes live on the screen, continuously updating the adjustments.

Soft foot

Measure, correct and save soft foot results.

Reporting

Measurement results can be emailed immediately as a clear single-page graphical report to facilitate and shorten the alignment cycle time.

tab@lign technical data



Transducer		Bluetooth® module	
	Measurement principle: Coaxial, reflected laser beam	Transmission power	Class 1, 100 mW
	Environmental protection: IP 67 (submersible, dustproof)	Transmission distance	10 m [33 ft.]
	Ambient light protection: yes	Compliance	FCC rules part 15.247
	Storage temperature: -20°C to 80°C [-4°F to 176°F]	LED indicators	1 LED for wireless communication, 3 LEDs for battery status
	Operating temperature: 0°C to 55°C [32°F to 131°F]	Power supply	Batteries 2 x 1.5 V IEC LR6 ("AA")
	Dimensions: approx. 107 x 70 x 49 mm [4 1/4" x 2 3/4" x 2"]	Operating time	14 hours typical use (based upon an operating cycle of 50% measurement, 50% standby)
	Weight: approx. 177 g [6 1/2 oz.]	Operating temperature	-10°C to 50°C [14°F to 122°F]
Laser	Type: Ga-Al-As semiconductor laser	Environmental protection	IP 65 (dustproof and water spray resistant), shockproof
	Wavelength (typical) 675 nm (red, visible)	Dimensions	Approx. 81 x 41 x 34 mm [3 1/8" x 1 11/16" x 1 5/16"]
	Safety class: Class 2, FDA 21 CFR 1000 and 1040	Weight	Approx. 133 g [4.7 oz.] including batteries and cable
	Beam power: < 1 mW	Device	
	Safety precautions: Do not look into laser beam	Apple	Compatible with iPhone 3GS, iPhone 4, iPhone 4S, iPhone 5, iPad, iPad 2, iPad (3rd and 4th generation), iPad mini, iPod touch (4th and 5th generation)
Detector	Resolution: 1 µm; Accuracy (avg): > 98%	Android	Requires version 2.3 or higher; Optimised for certain devices. For further details view www.pruftechnik.com
Inclinometer	Measurement range: 0° to 360°; Resolution: <1°		
CE conformity	EC guidelines for electric devices (73/23/EEC) and those relating to electromagnetic compatibility (2004/108/EC) are fulfilled		
Reflector			
	Type: 90° roof prism; Accuracy (avg): > 99%		
	Environmental protection: IP 67 (submersible, dustproof)		
	Storage temperature: -20°C to 80°C [-4°F to 176°F]		
	Operating temperature: -20°C to 60°C [-4°F to 140°F]		
	Dimensions: approx. 100 x 41 x 35 mm [4" x 1 5/8" x 1 3/8"]		
	Weight: approx. 65 g [2 1/2 oz.]		

PRÜFTECHNIK consists of the following business areas



Alignment Systems



Condition Monitoring



Nondestructive Testing



Service & Support

No copying or reproduction of this information, in any form whatsoever, may be undertaken without express written permission of PRÜFTECHNIK Alignment Systems GmbH. The information contained in this leaflet is subject to change without further notice due to the PRÜFTECHNIK policy of continuous product development. PRÜFTECHNIK products are subject to patents granted or pending throughout the world. ISO 9001:2008 certified.

© Copyright 2013 by PRÜFTECHNIK AG.



PRÜFTECHNIK
Alignment Systems GmbH
Freisinger Str.34
85737 Ismaning
Germany
Tel.: +49 89 99616-0
Fax: +49 89 99616-100
info@pruftechnik.com
www.pruftechnik.com

A member of the PRÜFTECHNIK group