

# SURETHERM<sup>PRO</sup> 1X Pivot




<b>Power rating</b>	12.8 kVA	<b>Current max.</b>	32 A
<b>Voltage</b>	400 - 480 - 575 V	<b>Frequency</b>	50 - 60 Hz


With the SURETHERM series TM Induction Heating introduced the new standard for induction heaters. The SURETHERM series are specially developed for tension free heating of bearings and gearwheels according to the industries' ever-growing standards and requirements. The unique 2 Sensor Mode will guarantee a fully controlled heating cycle. Without any extra effort, this heating method will prevent any unwanted tension in the bearing construction and changes to the metallurgic structures of gear wheels.

The modern touchscreen interface provides lots of settings and displays real time heating graphs in every heating mode. The graphs are downloadable through USB. Future firmware updates of both the touchscreen and the control board can be done easily through USB during the life cycle of the machine. And if you need to heat parts full power, as fast as possible, SURETHERM are the most powerful and effective low frequency induction heaters ever.

## DIMENSIONS

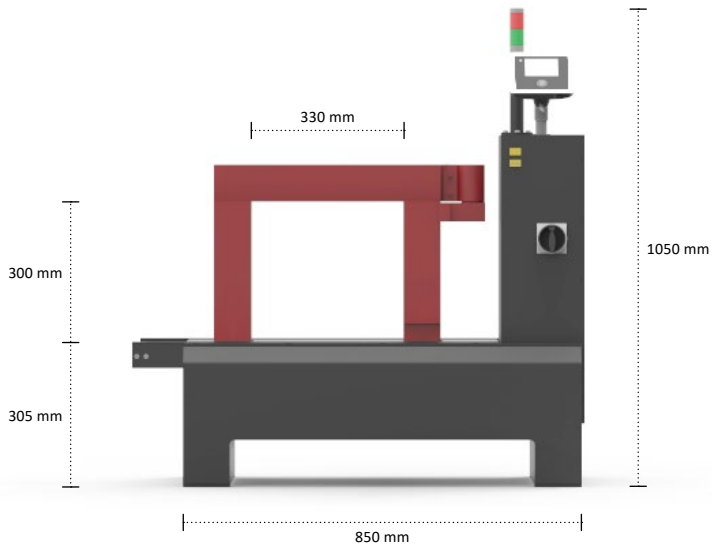


+ Trolley (Optional)

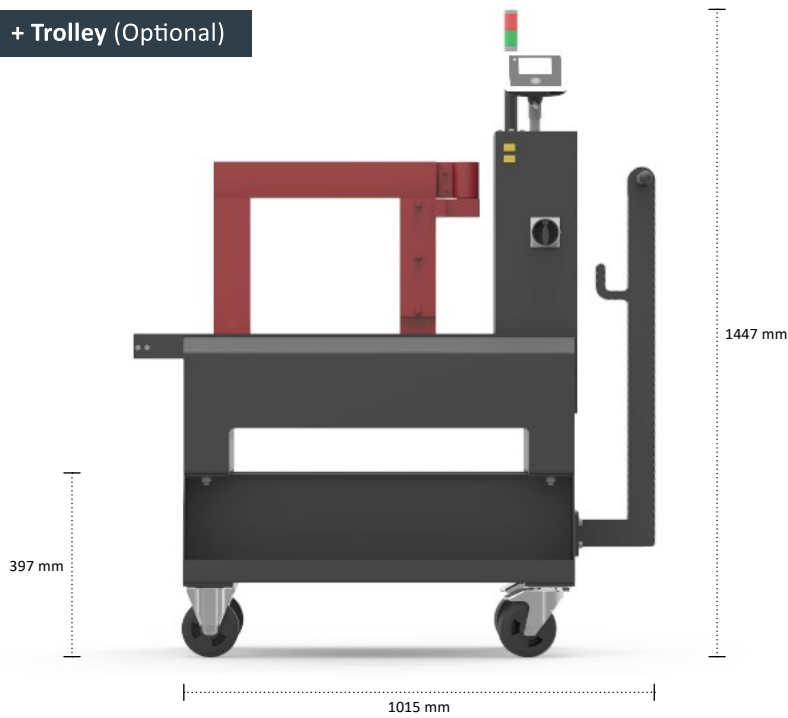

## DIMENSIONS WORKPIECE HORIZONTAL

(IN MILLIMETERS)


Min. bore	ø125
Max. outer diameter	ø1000
Max. width	290
Max. width incl. ext. yokes	490

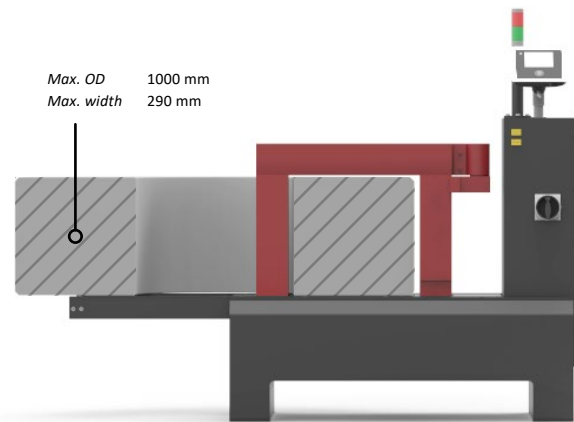

## DIMENSIONS WORKPIECE VERTICAL

(IN MILLIMETERS)


Max. outer diameter	ø680
Max. width	320
Max. outer diameter incl. ext. yokes	ø1080

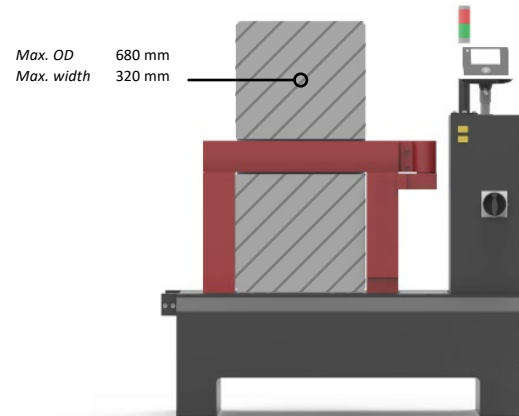

All extreme dimensions shown are theoretical. In practice there are multiple factors (e.g. workpiece weight, material and placement) that affect and limit the effective and proper heating of the workpiece.



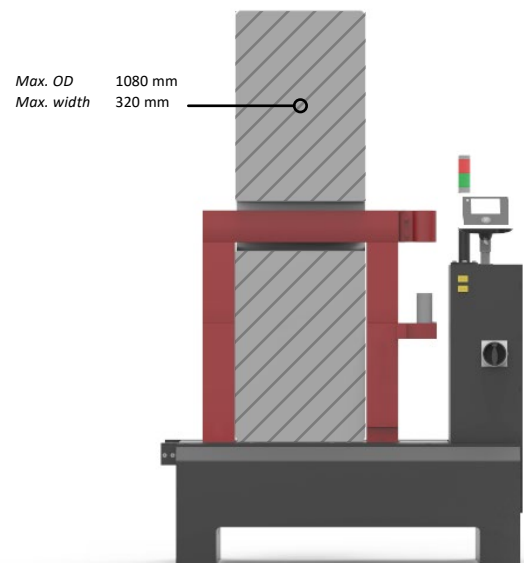

## MAX. WEIGHT WORKPIECE

Bearings	400 kg
Other	400 kg



## CONTROLS



	Cycle Parameters	On-Screen Feedback
 <b>1 Sensor Mode</b>	0 - 240 °C * Power 5 - 100%	Actual temp. and power, Set temp. and power, Timer
 <b>Ramp Mode</b>	5 - 240 °C * 0:00 - 99:59 (mm:ss / hh:mm)	Actual temp. and power, Set temp., Timer
 <b>2 Sensor Mode</b>	0 - 240 °C * ΔT 20 - 50 °C	Actual temp., ΔT and power, Set temp. and ΔT, Timer
 <b>Time Mode</b>	0:00 - 99:59 (mm:ss / hh:mm) Power 5 - 100%	Actual temp. and power, Set time and power, Countdown timer

\* Max. 400 °C, available on custom 400 °C execution.

## OTHER

Languages (standard)	English, Spanish, German, French, Italian
Error report	Shown in display
Heating graph	Shown in display
External interface	USB 2.0 Port
Sound signal	Buzzer
Temperature hold	Yes
Demagnetizing	< 2A/cm
Magnetic probe	2 Sensors
Thermal safety guard coil	Yes
Warranty	Max. 36 months (24 + 12)

## AVAILABLE YOKES (OPTIONAL)

<i>Dimensions (mm)</i>	<i>Min. bore (mm)</i>
20 x 20 x 490 Pivot	ø 30
30 x 26 x 490 Pivot	ø 40
40 x 38 x 490 Pivot	ø 55
50 x 48 x 490 Pivot	ø 70
60 x 60 x 490 Pivot	ø 85
70 x 70 x 490 Pivot	ø 100
80 x 80 x 490 Pivot	ø 115
Extension yokes (set)	80 x 80 x 150 80 x 80 x 200